


STEELFLEX



APLICAÇÃO

Para serviços de sucção leve onde mangueiras plásticas não suportam as severas condições de trabalho e temperatura.

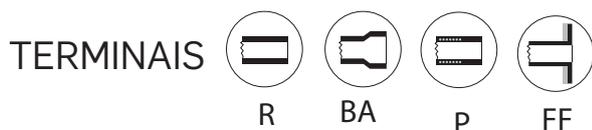

40 PSI

1/2"	1 1/8"	20	0,57	560	78
1"	1 5/8"	20	0,96	560	150
1 1/4"	1 7/8"	20	1,16	560	192
1 1/2"	2 1/4"	20	1,72	560	228
2"	2 3/4"	20	2,16	560	306
2 1/2"	3 1/4"	20	2,65	560	378
2 3/4"	3 1/2"	20	2,88	560	420
3"	3 3/4"	20	3,37	560	456
4"	4 3/4"	20	4,83	560	606

